

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 0 913 822 A2

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
06.05.1999 Bulletin 1999/18

(51) Int Cl.⁶: **G11B 20/12, G11B 27/034**
// H04N5/85

(21) Application number: **98307969.0**

(22) Date of filing: **01.10.1998**

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE
Designated Extension States:
AL LT LV MK RO SI

- **Babinski, James**
Scranton, Pennsylvania 18508 (US)
- **Seidel, Robert T.**
West Pittston, Pennsylvania 18643 (US)
- **McDermott, Jeffrey**
Scranton, Pennsylvania 18504 (US)
- **Shuta, Tressa**
Olyphant, Pennsylvania 18447 (US)

(30) Priority: **30.10.1997 US 961567**

(71) Applicant: **Wea Manufacturing Inc.**
Olyphant, PA 18447 (US)

(74) Representative: **Barnfather, Karl Jon, Dr. et al**
Withers & Rogers,
Goldings House,
2 Hays Lane
London SE1 2HW (GB)

(72) Inventors:
• **Glynn, Patrick J.**
Archbald, Pennsylvania 18403 (US)

(54) Recording medium and method for creating same

(57) The present invention relates to a recording medium including video (112), audio (114) and graphics (116) information stored in separate sets of data packets and a method for creating the same. The graphic infor-

mation can be superimposed on the video information during playback of the recording media. The graphic information can include text (210) or images (214,216). The text has a translucent background and the images (214,216) may be translucent in whole or in part.

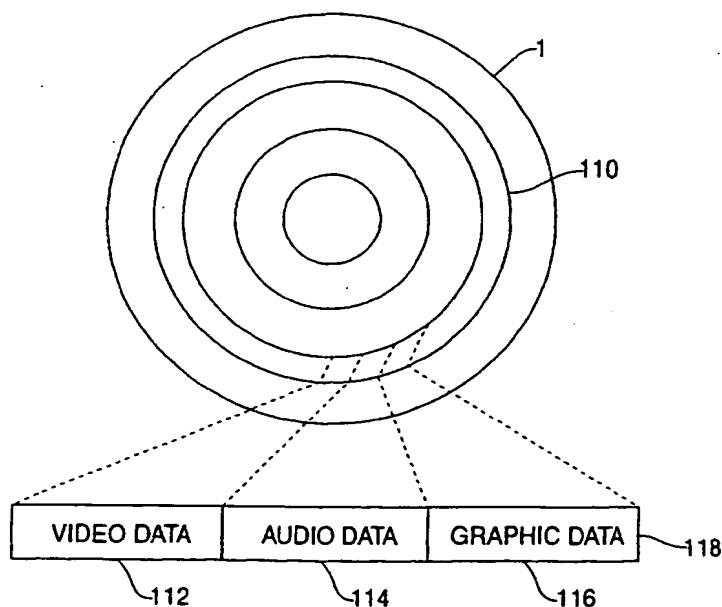


FIG. 1

EP 0 913 822 A2

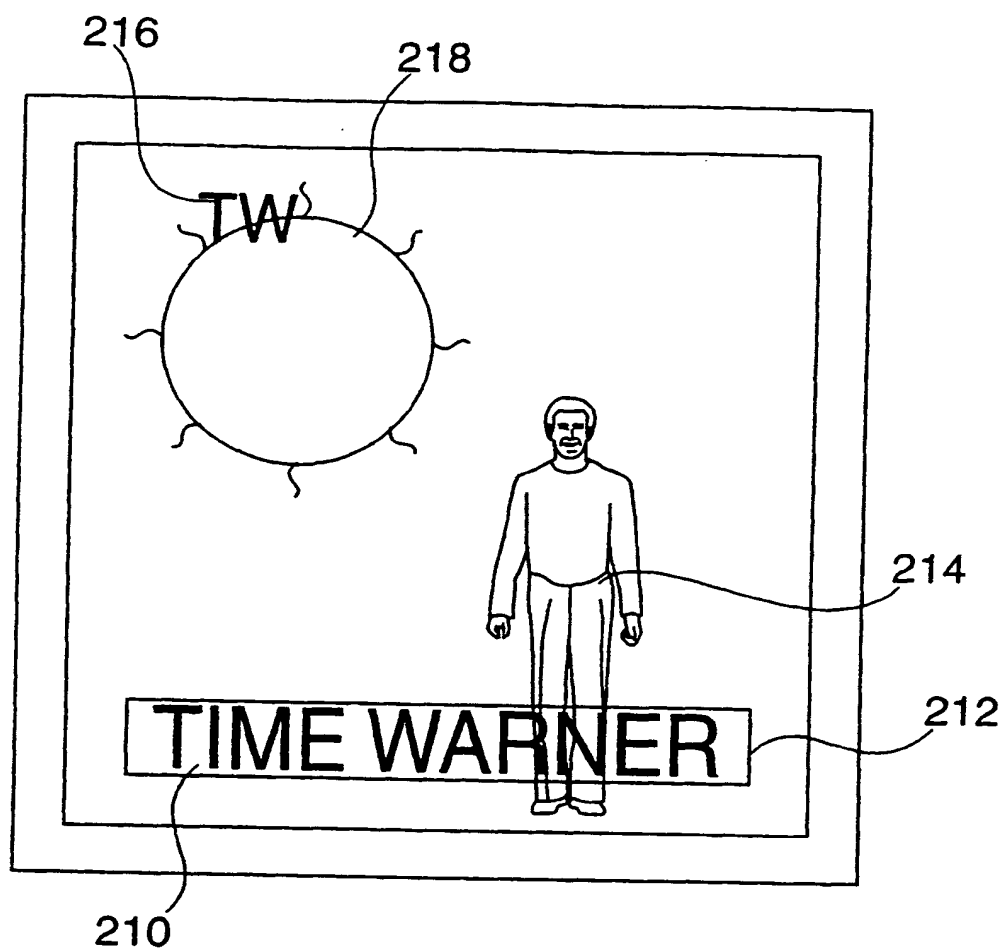


FIG. 2

Description

Background of the Invention

[0001] This invention relates to recording media including video, audio and graphics information stored in separate data packets. The graphic information can be superimposed on the video information during playback of the recording media. The graphic information can include text or images. The text has a translucent background and the images may be translucent in whole or in part.

[0002] Examples of such recording media include DVD discs, CD-I discs and CD-V discs. All of these recording media share the common characteristics of being able to store video, audio and graphics information in separate data packets.

[0003] Heretofore, such recording media were able to display graphic information that included text. The text included subtitles, usually displayed in white at the bottom of the screen superimposed on top of the video data. In certain cases, the text was provided with a black or darkly contrasting background to improve the readability of the text. However, although improving the readability of the text, the background obscured the video data on which it was superimposed.

[0004] Heretofore, such recording media were able to display graphic information that included images. The images, however, were of a solid color, thereby obscuring the video data on which they were superimposed.

[0005] In view of the foregoing, it would be desirable to provide a recording medium in which next data can be displayed with improved readability while minimizing any obstruction of the video data on which it is superimposed.

[0006] In view of the foregoing, it would be desirable to provide a recording medium in which an image which may be translucent in whole or in part, thereby not obscuring the video data on which it is superimposed.

Summary of the Invention

[0007] It is an object of the present invention to provide a recording medium in which text data can be displayed with improved readability while minimizing any obstruction of the video data on which it is superimposed.

[0008] It is a further object of the present invention to provide a recording medium in which an image which may be translucent in whole or in part, thereby not obscuring the video data on which it is superimposed.

[0009] These and other objects are accomplished by providing recording medium which includes a first set of data packets on which video data is recorded, a second set of data packets on which audio data is recorded and a third set of data packets on which graphic data is recorded wherein the graphic data is superimposed on the video data during display. The graphic data includes text

with a translucent background and/or an image which may be translucent in whole or in part.

Brief Description of the Drawings

[0010] The above and other objects and advantages of the invention will be apparent upon consideration of the following detailed description, taken in conjunction with the accompanying drawings, in which reference characters refer to like parts throughout and in which:

FIG. 1 shows a typical recording medium;

FIG. 2 shows the display portion of a playback device;

FIG. 3 is a flow chart with an exemplary embodiment of the method of the present invention;

FIG. 4 shows another flow chart with a further exemplary embodiment of the method of the present invention; and

FIG. 5 shows another flow chart with further details of the exemplary embodiment of the method of the present invention shown in FIG. 4.

Detailed Description of the Invention

[0011] The present invention relates to a recording medium including video, audio and graphics information stored in separate data packets and a method for creating the same. The graphic information can be superimposed on the video information during playback of the recording media. The graphic information can include text or images. The text can have a translucent background and the images may be translucent in whole or in part.

[0012] FIG. 1 shows a typical recording medium 1 such as a DVD disc, a CD-I disc or a CD-V disc. All of these recording media share the common characteristics of being able to store video, audio and graphics information in separate data packets 110 on the recording medium 1. Video data is stored in video data packets 112. Audio data is stored in audio data packets 113. Graphic data is stored in graphic data packets 116. The data packets 110 are segmented into a plurality of frames 118. Each frame 118 comprises video data, audio data and graphic data for reproduction during a set interval of time. Typically, the set interval of time is selected to correspond to the standard frame rates (i.e., one frame every 1/24 second, 1/25 second or 1/30 second).

[0013] FIG. 2 shows the display portion of a playback device on which graphic data is superimposed on video data. In particular, text 210, text background 212 and image 216 are superimposed on the video data which included video images 214 and 218. Text background 212 can be a pale green color, for example. As can be seen from FIG. 2, text background 212 allows the part video image 214 not obscured by text 210 to be seen, while providing increased readability of text 210. In ad-

dition, image 216, which may be a corporate logo, for example, may be translucent in whole or in part, thereby allowing the viewer to see more of video image 218.

[0014] Most recording media 1 in use today provide for multiple sets of graphic data packets 116. Indeed, the DVD disc provides up to 32 such sets of graphic data packets 116. During playback of the recording media 1 on a playback device, the user of the playback device may select which, if any, of the multiple sets of graphic data packets 116 he wishes to have displayed. For example, subtitles can be provided in any number of languages, each stored in a separate set of data packets. Also, various different logos can be displayed as images 216.

[0015] FIG. 3 is a flow chart with an exemplary embodiment of the method of the present invention.

[0016] In step 310, an input data file is selected by the operator. If the graphic data is to include text, the input data file includes text, text location, background, background location, display times, text font and other text information. If the graphic data is to include images, the input data file includes the location of the binary image file, display time and other image information. The binary image file is stored as a separate file on the disk drive.

[0017] In step 320, a blank bitmap is created. Usually, the size of the blank bitmap corresponds to the size of the video data to be displayed.

[0018] In step 330, it is determined whether the input data file includes text and text location, background and background locations. If the input data file includes text and text locations, background and background locations, the text and the background are placed at text locations and the background locations, respectively, on the bit map for an interval of time corresponding to the specified display time.

[0019] In step 340, it is determined whether the input data file includes an image and an image location. If the input data file includes an image and an image location, the image is placed at the image location on the bit map for an interval of time corresponding to the specified display time.

[0020] In step 350, the bitmap is saved on the computer's disk drive for importation into the recording medium 1.

[0021] As one skilled in the art will readily appreciate, steps 330-350 can be performed on a frame by frame basis for each frame in a sequence of frames. Also, one skilled in the art will readily appreciate that the steps need not be performed in the order indicated. For example, steps 330 and 340 may be performed in either order.

[0022] FIG. 4 shows another flow chart with a further exemplary embodiment of the method of the present invention.

[0023] In step 410, the user interface is started. The user interface may comprise, for example, a menu-driven program for use on a computer.

[0024] Step 420 can be further divided in to several

sub-steps. In sub-step 450, if the user desires to include text information in one of the sets of graphic data packets 116, the user selects an input data file which can include text, text placement, display times, etc. In sub-step 460, the user can select the text font. In step 470, if the user desires to include image information in one of sets of graphic data packets 116, the user can select an input image file which can include images, image locations, textured background, etc. In sub-step 480, the user can select one or more sets of graphic data packets 116 in which the output files (containing text and graphics) will be placed.

[0025] Step 430 is shown as a subroutine and will be discussed in relation to FIG. 5. In step 440, the program ends.

[0026] FIG. 5 shows another flow chart with further details of the exemplary embodiment of the method of the present invention shown in FIG. 4, in particular, step 430. It should be noted that one skilled in the art will readily appreciate the many possible divisions of the program into subroutines or sub-steps that are possible.

[0027] In step 500, the execution of the subroutines begins.

[0028] In step 510, the system examines the input data file selected in step 450 to determine if more data needs to be processed. If no more data needs to be processed, the system proceeds to step 594 to end execution of the subroutine. Otherwise, if more data needs to be processed the system continues to step 520.

[0029] In step 520, a blank bitmap is created. The bitmap corresponds in size to the video data to be displayed.

[0030] In step 530, a line of text and the associated text locations from the data input file are retrieved.

[0031] In step 540, the system determines if an image file has been selected. If an image file has been selected, the system proceeds to step 560, otherwise it proceeds to step 590.

[0032] In step 560, the images are placed at the image location on the bit map corresponding to the image location.

[0033] In step 570, the system determines if textured background is chosen. If textured background has been chosen, the system proceeds to step 580, otherwise the system proceeds to step 590.

[0034] In step 580, textured background is inserted at the correct location in the bitmap.

[0035] In step 590, the text is placed at the text locations in the bitmap.

[0036] In step 592, the bitmap file is saved on the computer's disk drive for importation into the set (or sets) of graphic data packets selected in sub-step 480 and the system returns to step 510.

[0037] It should be noted that one skilled in the art will readily appreciate that the order of the steps (for example, steps 540 and 590) and sub-steps described above can be changed without affecting the operation of the invention.

[0038] Thus, it is seen that a recording medium including video, audio and graphics information stored in separate sets of data packets whereby the graphic information can be superimposed on the video information during playback of the recording media and the graphic information can include text or images and a method for creating the same is provided. One skilled in the art will appreciate that the present invention can be practiced by other than the described embodiments, which are presented for purposes of illustration and not of limitation, and the present invention is limited only by the claims which follow.

Claims

1. A recording medium comprising:

a first set of data packets on which video data is recorded;
a second set of data packets on which audio data is recorded; and
a third set of data packets on which graphic data is recorded;
wherein:
said graphic data is superimposed on said video data during display, and
said graphic data is selected from the group consisting of:
text with a translucent background and
an image which may be translucent in whole or in part.

2. The recording medium of claim 1 for use with a playback device wherein said graphic data recorded in said third set of data packets may be selectively displayed by a user of said playback device.

3. The recording medium of claim 1 wherein said graphic data is stored in graphic data packets as a run-length compressed image file.

4. The recording medium of claim 1 wherein said first, second and third sets of data packets are segmented into a plurality of frames, whereby any one of said plurality of frames comprises video data, audio data and graphic data for reproduction during a set interval of time.

5. The recording medium of claim 4 wherein said set interval of time is selected from the group consisting of 1/24 second, 1/25 second and 1/30 second.

6. The recording medium of any one of claims 1 through 5 wherein said recording medium comprises a DVD disc.

7. The recording medium of any one of claims 1

through 5 wherein said translucent background is textured.

8. A method for generating graphic data for use in a recording medium comprising a first set of data packets on which video data is recorded, a second set of data packets on which audio data is recorded and a third set of data packets on which said graphic data is recorded, said method comprising the steps of:

selecting an input data file;
creating a blank bit map;
determining whether said input data file includes text and text locations, background and background locations and placing said text and said background at next locations and said background locations, respectively, on said bit map;
determining whether said input data file includes an image and an image location and placing said image at said image location on said bit map; and
transferring said bit map to said third set of data packets.

9. The method of claim 8 wherein said transferring step comprises the sub-steps of:

storing said bit map in output files located in a computer including a disk drive; and
placing said bit map stored in said output files onto said disk for importation onto said recording medium.

10. The method of claim 8 wherein said recording medium is for use with a playback device and said graphic data recorded in said third set of data packets may be selectively displayed by a user of said playback device.

11. The method of claim 8 wherein said graphic data is stored in graphic data packets as a run-length compressed image file.

12. The method of claim 8 wherein said first, second and third sets of data packets are segmented into a plurality of frames, whereby any one of said plurality of frames comprises video data, audio data and graphic data for reproduction during a set interval of time.

13. The method of claim 12 wherein said set interval of time is selected from the group consisting of 1/24 second, 1/25 second and 1/30 second.

14. The method of any one of claims 11 through 13 wherein said recording medium comprises a DVD

disc.

15. The method of any one of claims 11 through 13 wherein said translucent background is textured.

5

16. A DVD disc for use with a playback device by a user comprising:

a first set of data packets on which video data is recorded;

10

a second set of data packets on which audio data is recorded; and

a third set of data packets on which graphic data is recorded;

wherein:

15

said graphic data is superimposed on said video data during display,

said graphic data is selected from the group consisting of:

text with a translucent background and an image which may be translucent in whole or in part,

20

said graphic data recorded in said third set of data packets may be selectively displayed by said user of said playback device,

25

said graphic data is stored in graphic data packets as a run-length compressed image file, and said first, second and third sets of data packets are segmented into a plurality of frames, whereby any one of said plurality of frames comprises

30

video data, audio data and graphic data for reproduction during a set interval of time.

35

40

45

50

55

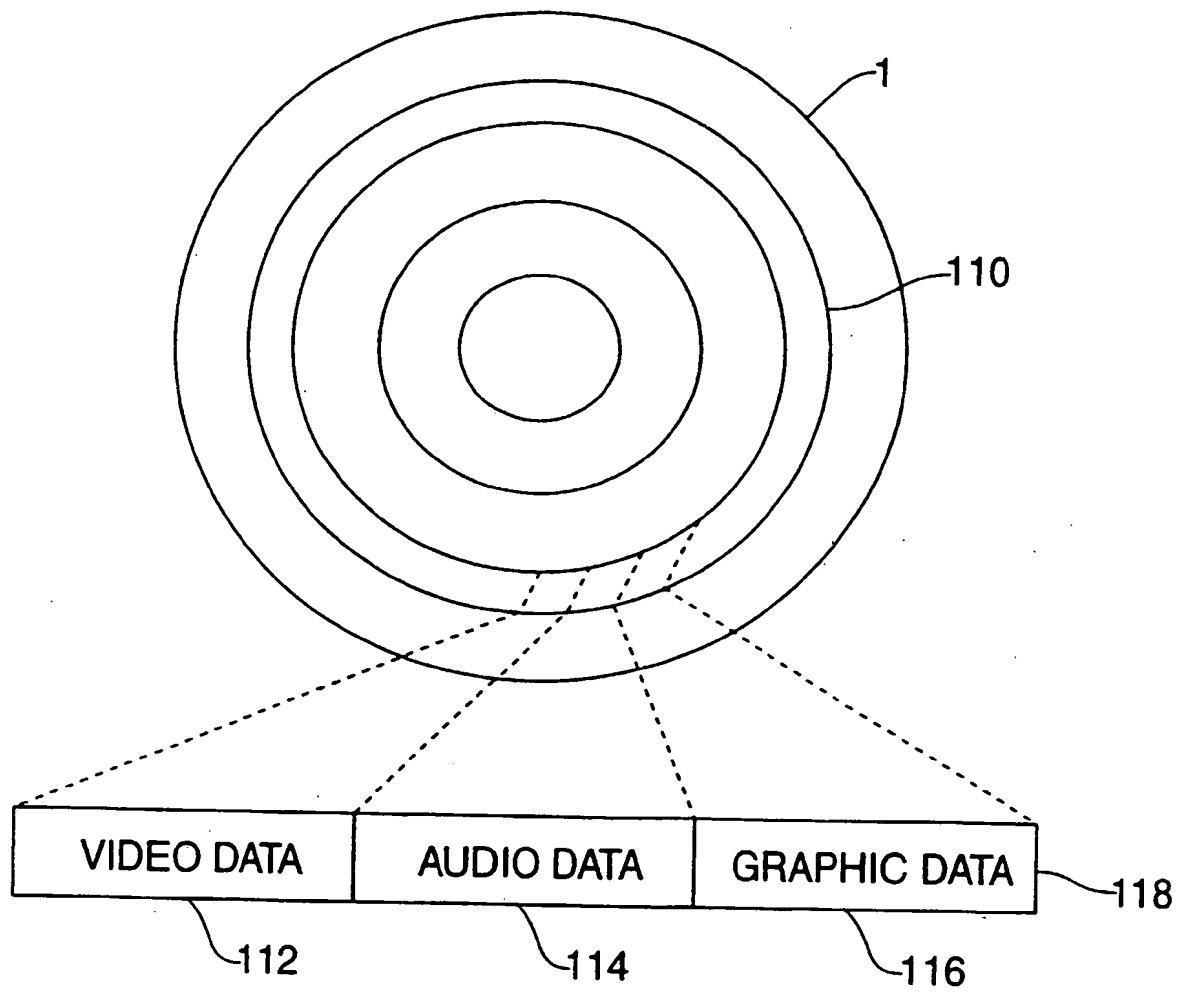


FIG. 1

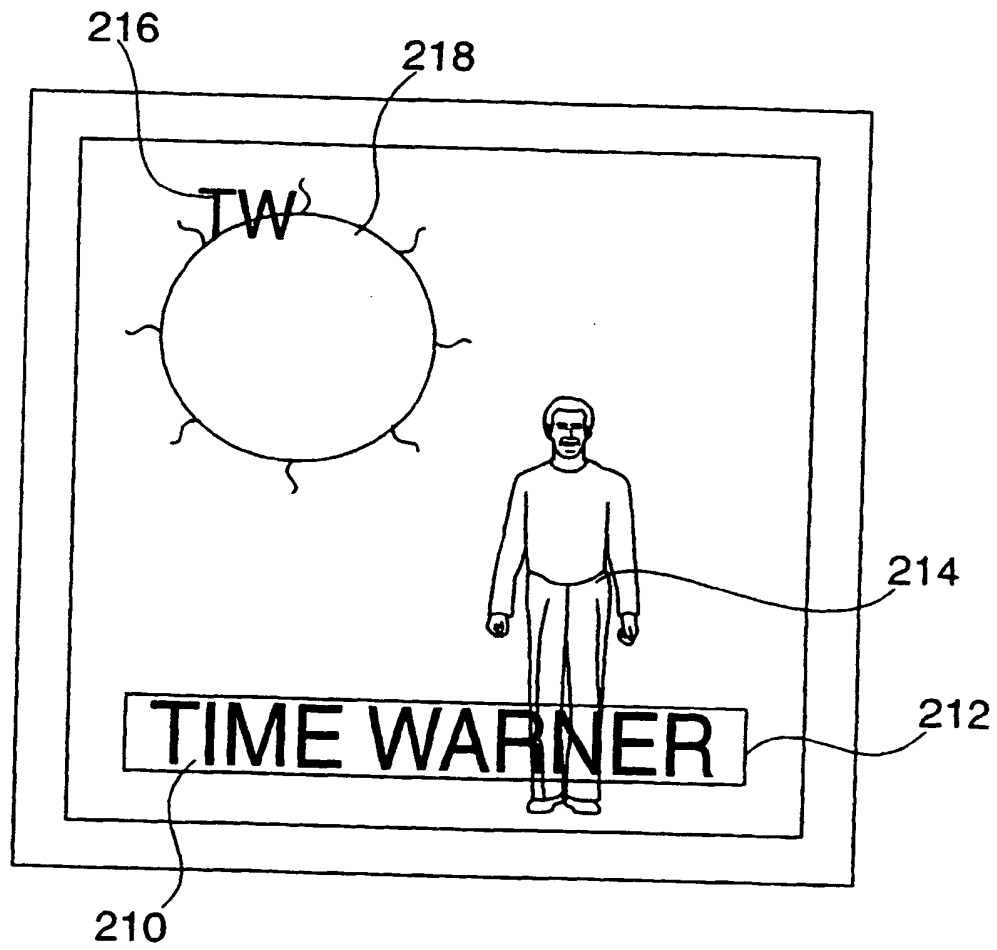


FIG. 2

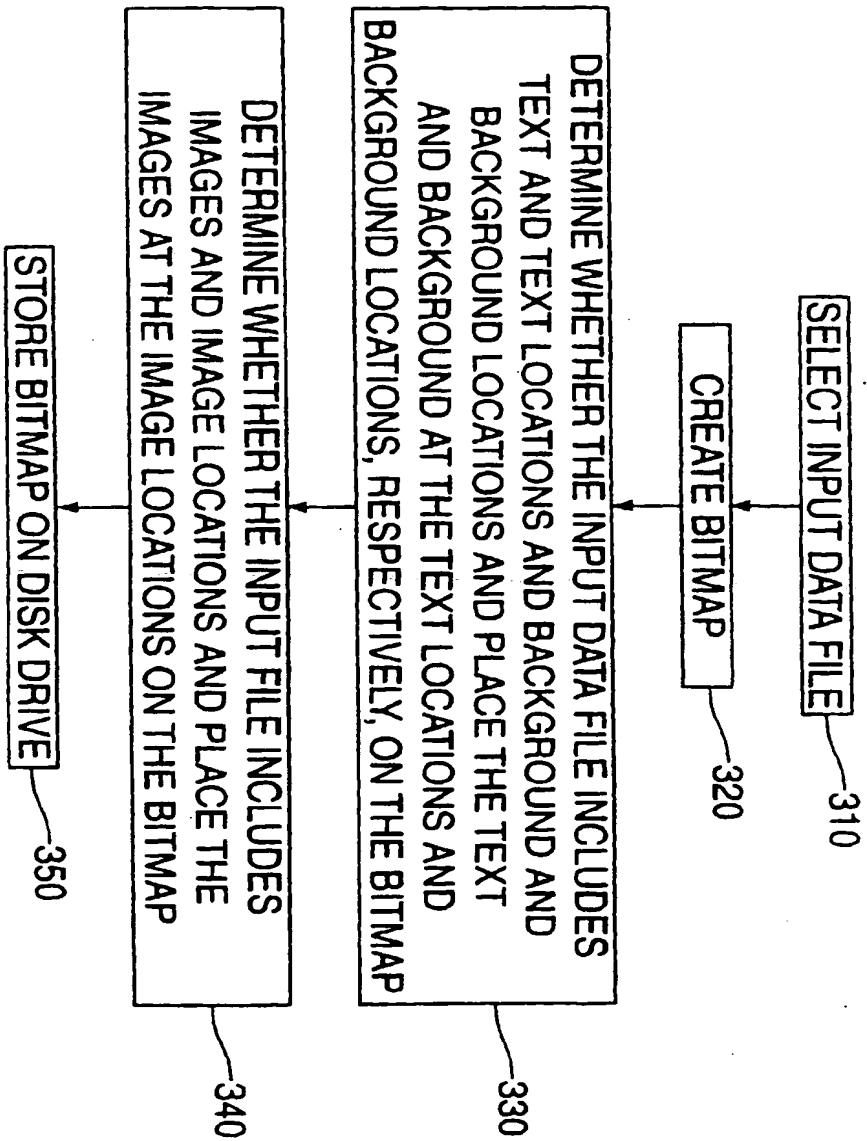


FIG. 3

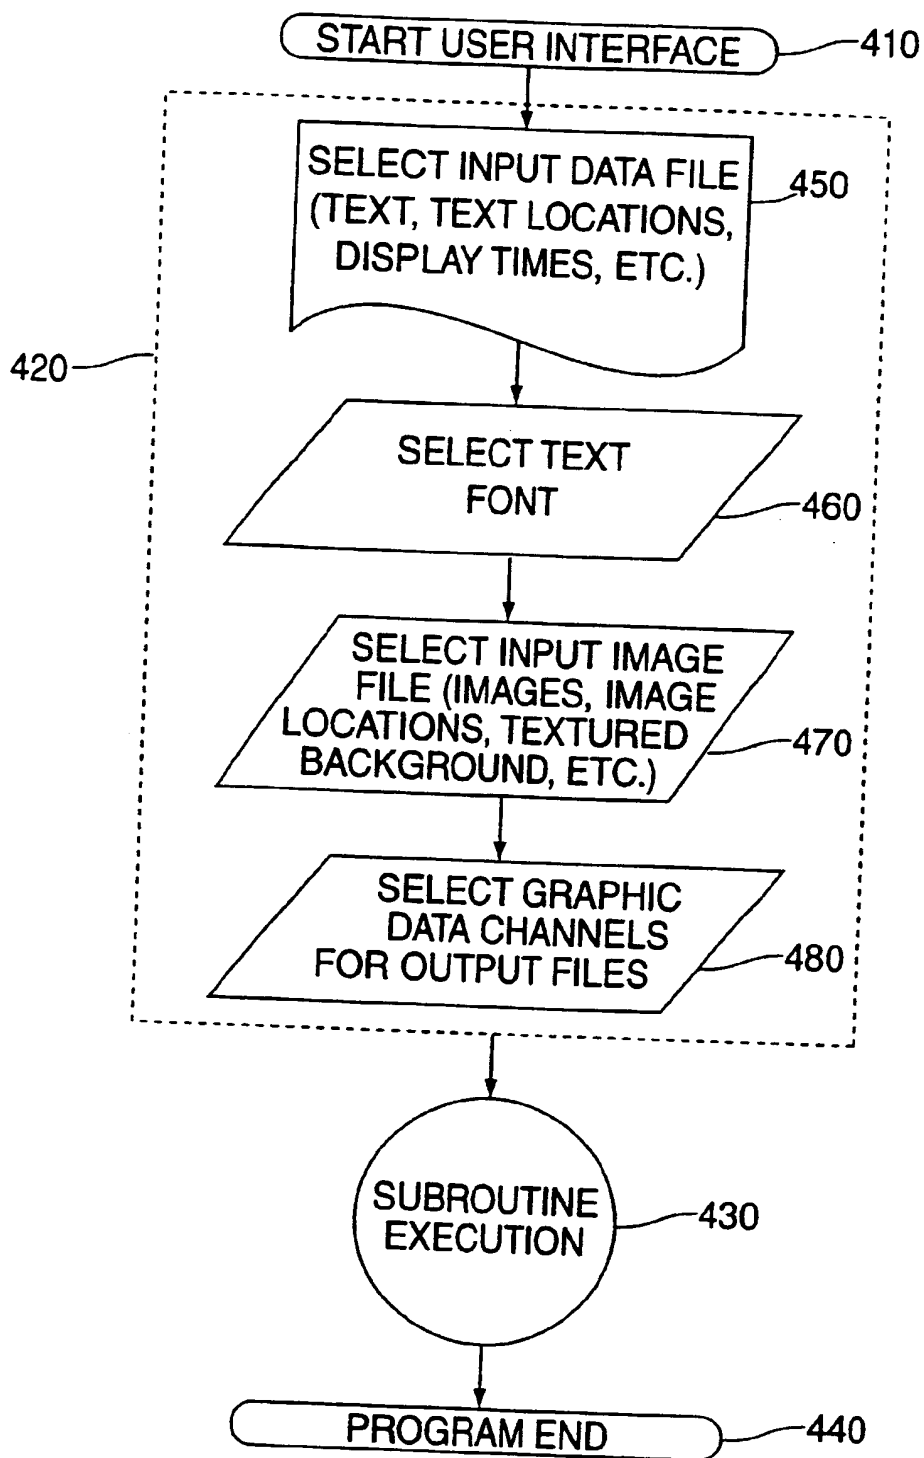


FIG. 4

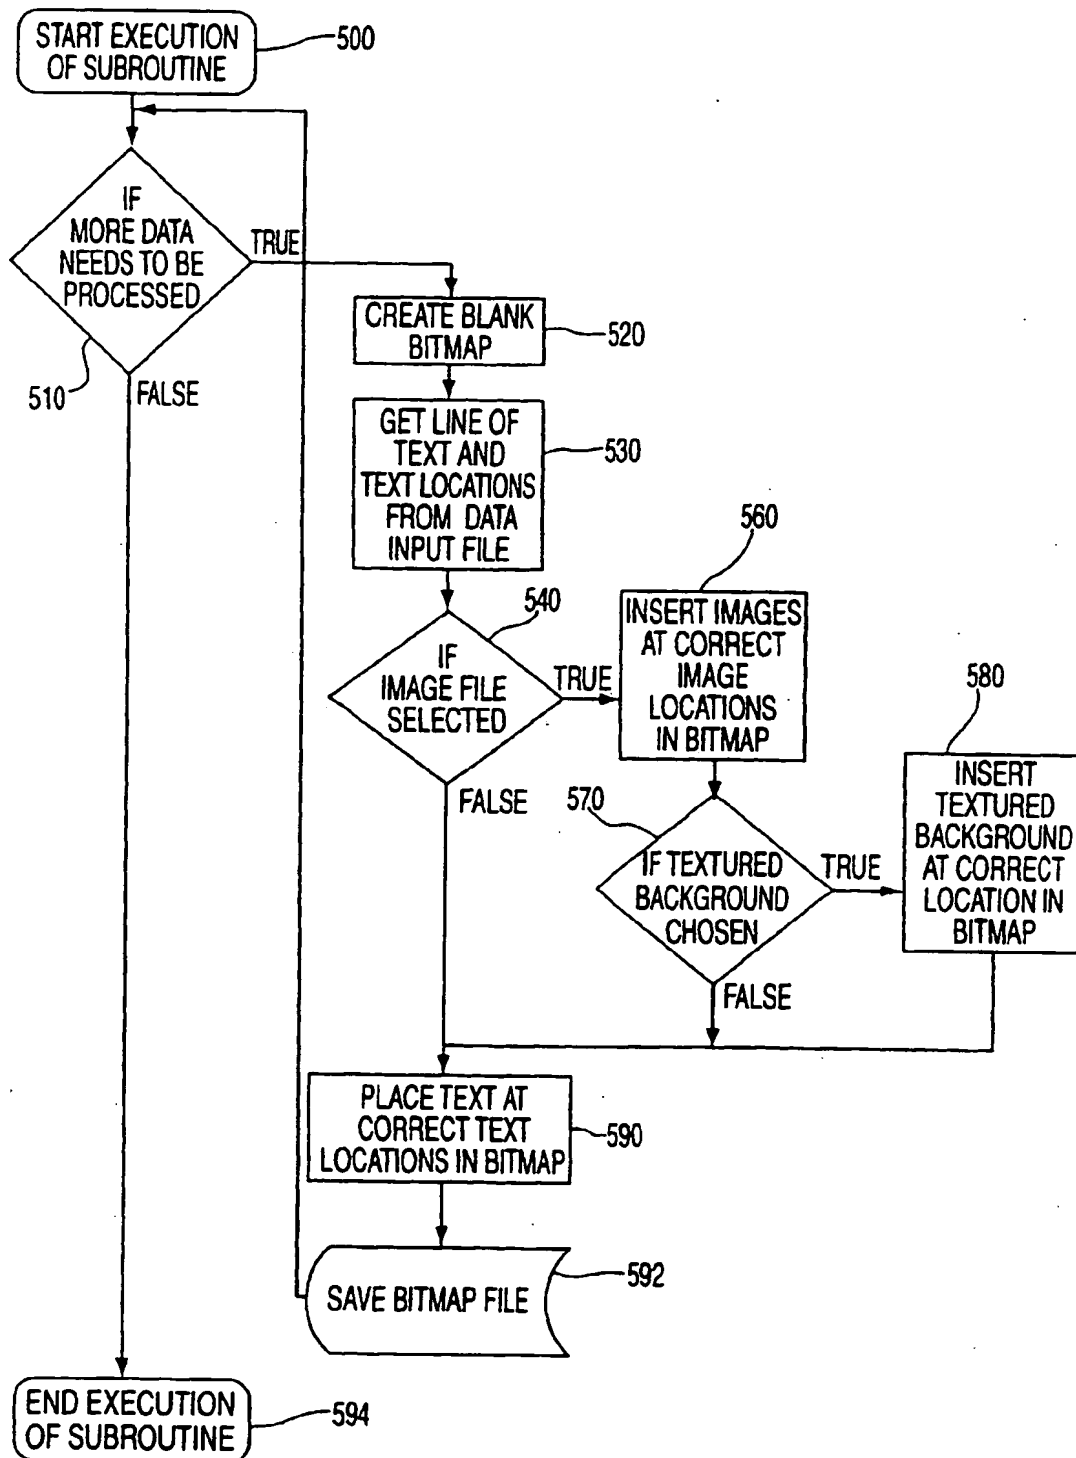


FIG. 5

THIS PAGE BLANK (USPTO)

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 0 913 822 A3

(12)

EUROPEAN PATENT APPLICATION

(88) Date of publication A3:
12.05.1999 Bulletin 1999/19

(51) Int Cl.⁶: **G11B 20/12, G11B 27/034**
// H04N5/85

(43) Date of publication A2:
06.05.1999 Bulletin 1999/18

(21) Application number: **98307969.0**

(22) Date of filing: **01.10.1998**

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE
Designated Extension States:
AL LT LV MK RO SI

- Babinski, James
Scranton, Pennsylvania 18508 (US)
- Seidel, Robert T.
West Pittston, Pennsylvania 18643 (US)
- McDermott, Jeffrey
Scranton, Pennsylvania 18504 (US)
- Shuta, Tressa
Olyphant, Pennsylvania 18447 (US)

(30) Priority: **30.10.1997 US 961567**

(71) Applicant: **Wea Manufacturing Inc.**
Olyphant, PA 18447 (US)

(72) Inventors:
• Glynn, Patrick J.
Archbald, Pennsylvania 18403 (US)

(74) Representative: **Barnfather, Karl Jon, Dr. et al**
Withers & Rogers,
Goldings House,
2 Hays Lane
London SE1 2HW (GB)

(54) Recording medium and method for creating same

(57) The present invention relates to a recording medium including video (112), audio (114) and graphics (116) information stored in separate sets of data packets and a method for creating the same. The graphic infor-

mation can be superimposed on the video information during playback of the recording media. The graphic information can include text (210) or images (214,216). The text has a translucent background and the images (214,216) may be translucent in whole or in part.

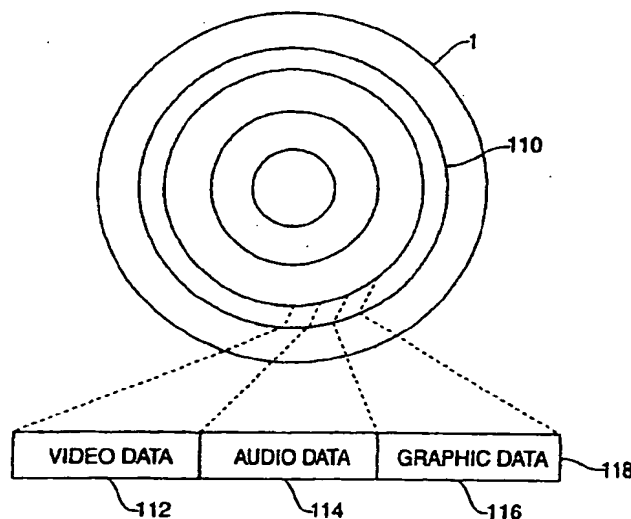


FIG. 1

EP 0 913 822 A3

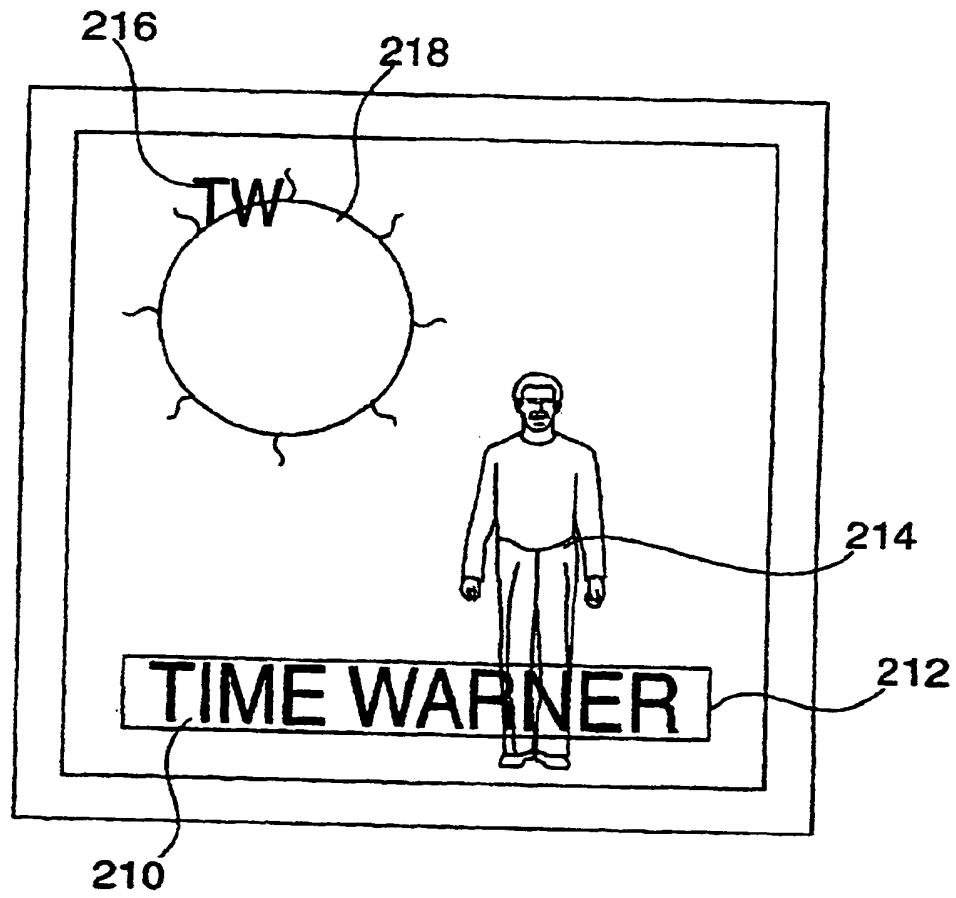


FIG. 2



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 98 30 7969

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
A	PATENT ABSTRACTS OF JAPAN vol. 097, no. 009, 30 September 1997 & JP 09 127965 A (FUJITSU GENERAL LTD), 16 May 1997 * the whole document *	1,8-10, 12,14,16	G11B20/12 G11B27/034 //H04N5/85
A	EP 0 330 732 A (PIONEER ELECTRONIC CORP ;PIONEER VIDEO CORP (JP)) 6 September 1989 * abstract * * column 1, line 6 - line 38 * * column 5, line 31 - line 52 * * column 8, line 24 - column 9, line 11 * * column 17, line 12 - column 19, line 37 * * claims 1-5 * * figures 10,15A-C *	1,2,8	
A	US 5 432 900 A (RHODES KENNETH E ET AL) 11 July 1995 * column 1, line 18 - column 3, line 27 * * column 4, line 52 - column 8, line 8 * * figures 1-3 *	1-4, 8-12,16	
A	US 4 644 401 A (GASKINS ARTHOR L) 17 February 1987 * abstract * * column 1, line 42 - column 2, line 17 * * column 3, line 40 - column 4, line 60 * * column 6, line 38 - column 7, line 19 * * figures 1,6 *	1,2,4,8, 12,16	TECHNICAL FIELDS SEARCHED (Int.Cl.6) G11B
A	PATENT ABSTRACTS OF JAPAN vol. 016, no. 005 (P-1295), 8 January 1992 & JP 03 228086 A (TOSHIBA EMI LTD), 9 October 1991 * abstract *	1	
-/--			
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 9 March 1999	Examiner Schiwy-Rausch, G
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			

EPO FORM 1803 (03/82) (P04C01)



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 98 30 7969

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
A	DATABASE WPI Section PQ, Week 9651 Derwent Publications Ltd., London, GB; Class P86, AN 96-512158 XP002095981 & JP 08 265701 A (SAMSUNG ELECTRONICS CO LTD), 11 October 1996 * abstract *	1,2	
A,P	& US 5 726 373 A (CHOI HAE-MIN ET AL.) 10 March 1998 * abstract; figures 10,25-31 * * column 1, line 7 - line 65 * * column 2, line 8 - column 3, line 58 * * column 10, line 23 - line 67 * * column 25, line 54 - column 26, line 65 *	1,2	
A	EP 0 539 146 A (PIONEER ELECTRONIC CORP) 28 April 1993		
A	PATENT ABSTRACTS OF JAPAN vol. 097, no. 006, 30 June 1997 & JP 09 034475 A (TOOKADO:KK), 7 February 1997		
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 9 March 1999	Examiner Schiwy-Rausch, G
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons : member of the same patent family, corresponding document</p>			

EPO FORM 1500 03/92 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 98 30 7969

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

09-03-1999

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 0330732	A	06-09-1989	JP 1221072 A	04-09-1989
			JP 2082809 C	23-08-1996
			JP 7118798 B	18-12-1995
			DE 3852629 D	09-02-1995
			DE 3852629 T	04-05-1995
			US 5097349 A	17-03-1992
US 5432900	A	11-07-1995	NONE	
US 4644401	A	17-02-1987	NONE	
EP 0539146	A	28-04-1993	JP 5113751 A	07-05-1993
			DE 69206954 D	01-02-1996
			DE 69206954 T	29-08-1996

EPO FORM P0460

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

THIS PAGE BLANK (USPTO)